

Fixed street-cover
Floating street-cover
Distance ring for fixed street cover
Square for fixed street cover

Use:

For all extension spindles

Materials:

»Fixed« street-cover:

Body and lid	Grey cast iron GG-25 to DIN 1691 (BS 1452 grade 220/250)
Coating	Electrostatically applied epoxy resin to DIN 30677 - Internally and externally
Lid-sealing	Vulcanized NBR-rubber gasket for extra sealing

»Floating« street-cover:

Body	Ductile iron GGG-40 to DIN 1693 (BS 2789 grade 420-12)
Lid	Grey cast iron GG-25 to DIN 1691 (BS 1452 grade 220/250)
Coating	Electrostatically applied epoxy resin to DIN 30677 - Internally and externally
Lid-sealing	Vulcanized NBR rubber gasket for extra sealing


Distance ring, Square for fixed street cover:	Ductile iron GGG-40 to DIN 1693 (BS 2789 grade 420-12)
--	--




Fixed street-cover
Floating street-cover
Distance ring for fixed street cover
Square for fixed street cover

Component list					
1. Body					
2. Lid					
3. Lid-sealing					


"Fixed" street cover					
Body Ref. nos.	Lid Ref. nos.	H mm	d mm	D mm	Weight kilos
04-000-5100	04-000-5200	190	80	195	6.5

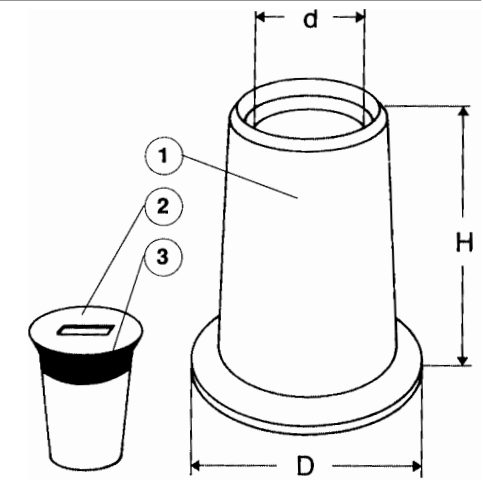

Square for fixed street cover				
Body Ref. nos.	H mm	d mm	D mm	Weight kilos
04-013-5400	20	80	130	1.5



Distance ring		
Ref. nos.	H mm	Weight kilos
04-001-5300	10	0.5
04-001-5400	20	0.8
04-001-5500	30	1.0
04-001-5600	40	1.5
04-001-5700	50	2.0



Component list					
1. Body					
2. Lid					
3. Lid-sealing					

"Floating" street-cover					
Body Ref. nos.	Lid Ref. nos.	H mm	d mm	D mm	Weight kilos
04-000-6000	04-000-5200	130	80	200	6
04-002-6000	04-002-6200	150	120	240	10

