

Composite street cover Round or square surface plate

Use:

For AVK telescopic extension spindle.

Application:

Short term max 180 degrees.

Optional extra:

Various lid inscriptions.


Materials:

Surface plate and lid	Ductile iron min. GGG-40, to DIN 1693 (BS 2789 grade 420 - 12 min.)
Coating	Outside electrostatically applied epoxy resin to DIN 30677 and GSK, inside max 150 my
O-ring	NBR
Body	Polyamid PA6



Composite street cover
Round or square surface plate

Component list	
1. Surface plate	3. Lid
2. O-ring	4. Body

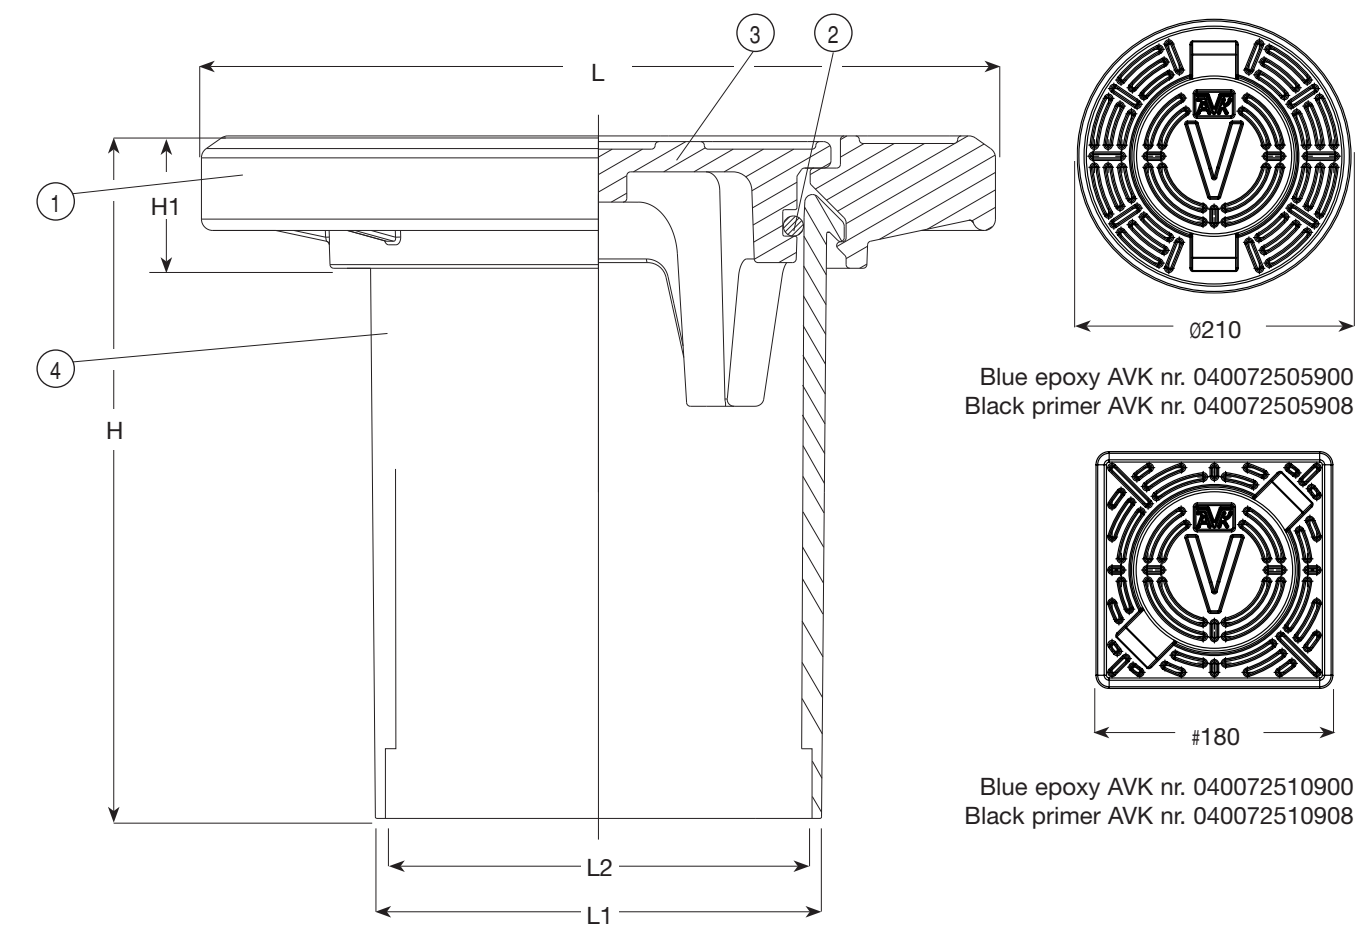

Blue epoxy RAL 5017							
Complete street cover "V"	Lid "V"	L	L1	L2	H	H1	Weight
Ref. nos.	Ref. nos.	mm	mm	mm	mm	mm	kilos
04-007-2505900	04-007-2500900	Ø 210	Ø 118	Ø 110	180	35	4.3
04-007-2510900	04-007-2500900	# 180	Ø 118	Ø 110	180	35	4.2
Black primer							
Complete street cover "V"	Lid "V"	L	L1	L2	H	H1	Weight
Ref. nos.	Ref. nos.	mm	mm	mm	mm	mm	kilos
04-007-2505908	04-007-2500908	Ø 210	Ø 118	Ø 110	180	35	4.3
04-007-2510908	04-007-2500908	# 180	Ø 118	Ø 110	180	35	4.2