

Universal street cover

Use:

For AVK telescopic extension spindle.

Materials:

Body and distance ring	Ductile iron, GGG-40, to DIN 1693 (BS 2789 grade 420 - 12 min.)
Lid	Grey cast iron, GG-25, to DIN 1691 (BS 1452 grade 220/250)
Coating	Electrostatically applied epoxy resin to DIN 30677
Fixation plate	PE
O-ring	NBR

Accessories:

15 mm distance ring
Plastic support plate



Universal street cover


Component list

1. O-ring

2. Lid

3. Fixation plate
4. 15 mm distance ring

5. Body

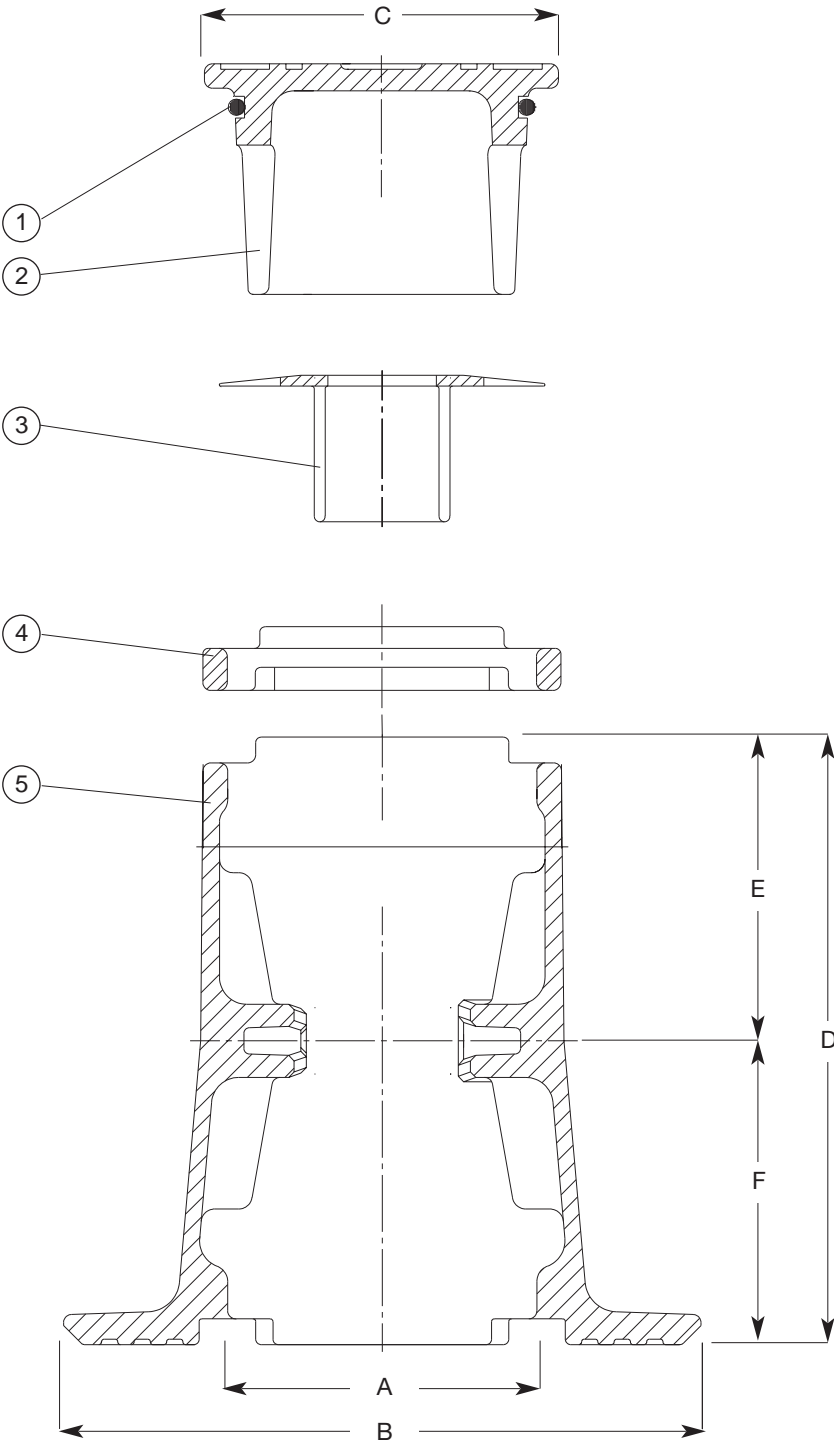

Complete street cover without distance ring Ref. nos.	Lid + O-ring Ref. nos.	Body Ref. nos.	Fixation plate Ref. nos.	15 mm distance ring Ref. nos.	A mm	B mm	C mm	D* mm	E mm	F mm	Weight kilos
04 003 69000	04 003 6900	04 003 5100	04 003 59	04 003 5300	114	235	130.5	224	112	112	10.5

* Total height incl. lid and distance ring.