

Surface box for gate valves, water
Height adjustable: Upper and base part of housing are adjustable in height for + 220 mm

Types:

Series 80/31: Height adjustable
(DIN 4056V) Heat resistant to
max. 250°C

Series 80/31: Heat resistant to
(DIN 4056Z) max. 250°C

Standard lid inscription: "W"

Materials:

Housing	PA+
Lid	GG-20
Bolt	Stainless steel A2

Norms and approvals:

DIN, NEN, EN, DVGW

Optional extra:

Various lid inscriptions




80/31
(DIN 4056V)



80/31
(DIN 4056Z)

Surface box for gate valves, water
Height adjustable: Upper and base part of housing are adjustable in height for + 220 mm

- Component list**
- 1. Lid
 - 2. Bolt
 - 3. Housing

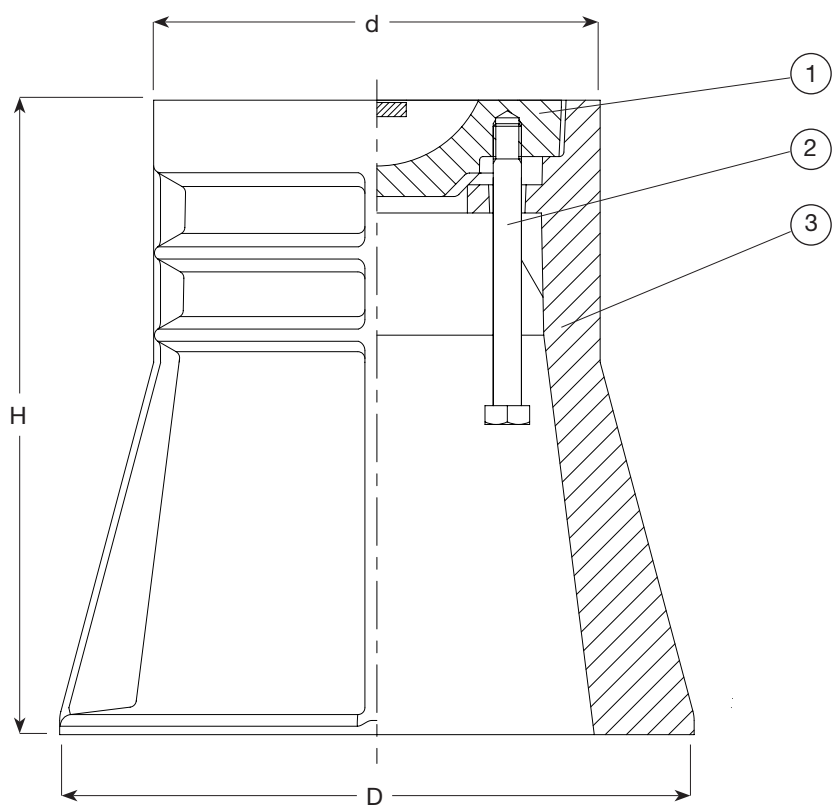

Ref. nos	Inscription	D mm	d mm	H mm	Weight housing kilos	Weight lid kilos
80-3113000 (DIN 4056V)	W	280	190	290	2.0	3.6
80-3103200 (DIN 4056Z)	W	280	195	280	2.0	3.6